


W4000系列,英制六角驱动盒和六角内插件

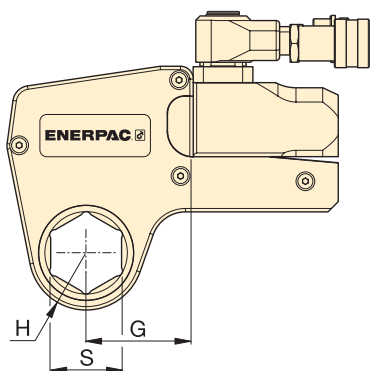

700 bar压力下最大扭矩:

5423 Nm

六角对边尺寸范围:

1⁵/₁₆ - 3³/₈ inch

最大工作压力:

700 bar

W
系列



驱动头 型号	六角尺寸 ¹⁾		操作半 径	Dim. G (mm)	型号	(kg)	六角内插件		六角内插件		六角内插件	
	S (inch)	H (mm)					(inch)	型号	(inch)	型号	(inch)	型号
W4000	1 ⁵ / ₁₆	37	61	W4105	3.7	—	—	—	—	—	—	—
	1 ³ / ₈	37	61	W4106	3.7	—	—	—	—	—	—	—
	1 ⁷ / ₁₆	37	61	W4107	3.7	—	—	—	—	—	—	—
	1 ¹ / ₂	37	61	W4108	3.7	—	—	—	—	—	—	—
	1 ⁹ / ₁₆	37	61	W4109	3.7	—	—	—	—	—	—	—
	1 ⁵ / ₈	37	61	W4110	3.7	—	—	—	—	—	—	—
	1 ¹¹ / ₁₆	40	64	W4111	3.8	—	—	—	—	—	—	—
	1 ³ / ₄	40	64	W4112	3.8	—	—	—	—	—	—	—
	1 ¹³ / ₁₆	40	64	W4113	3.8	—	—	—	—	—	—	—
	1 ⁷ / ₈	42	67	W4114	3.9	—	—	—	—	—	—	—
	1 ¹⁵ / ₁₆	42	67	W4115	3.9	—	—	—	—	—	—	—
	2	42	67	W4200	3.9	2 - 1 ⁷ / ₈	W4200R107	—	—	—	—	—
	2 ¹ / ₁₆	44	73	W4201	4.0	—	—	—	—	—	—	—
	2 ¹ / ₈	44	73	W4202	4.0	—	—	—	—	—	—	—
	2 ³ / ₁₆	44	73	W4203	4.0	2 ³ / ₁₆ - 1 ⁵ / ₈	W4203R110	2 ³ / ₁₆ - 1 ⁷ / ₁₆	W4203R107	2 ³ / ₁₆ - 1 ¹ / ₄	W4203R104	—
	2 ¹ / ₄	47	71	W4204	4.1	—	—	—	—	—	—	—
	2 ⁵ / ₁₆	47	71	W4205	4.1	—	—	—	—	—	—	—
	2 ³ / ₈	47	71	W4206	4.1	2 ³ / ₈ - 2	W4206R200	2 ³ / ₈ - 1 ¹³ / ₁₆	W4206R113	2 ³ / ₈ - 1 ⁷ / ₁₆	W4206R107	—
	—	—	—	—	—	2 ³ / ₈ - 1 ³ / ₈	R4206R106	—	—	—	—	—
	2 ⁷ / ₁₆	50	76	W4207	4.1	2 ⁷ / ₁₆ - 2	W4207R200	—	—	—	—	—
	2 ¹ / ₂	50	76	W4208	4.1	2 ¹ / ₂ - 2	W4208R200	2 ¹ / ₂ - 1 ⁷ / ₁₆	W4208R113	—	—	—
	2 ⁹ / ₁₆	50	76	W4209	4.1	2 ⁹ / ₁₆ - 2 ³ / ₁₆	W4209R203	2 ⁹ / ₁₆ - 2 ¹ / ₈	W4209R202	2 ⁹ / ₁₆ - 2 ¹ / ₁₆	W4208R201	—
	—	—	—	—	—	2 ⁹ / ₁₆ - 2	W4209R200	2 ⁹ / ₁₆ - 2 ¹³ / ₁₆	W4209R113	—	—	—
	2 ⁵ / ₈	53	78	W4210	4.2	—	—	—	—	—	—	—
	2 ¹¹ / ₁₆	53	78	W4211	4.2	—	—	—	—	—	—	—
	2 ³ / ₄	53	78	W4212	4.2	2 ³ / ₄ - 2 ³ / ₈	W4212R206	2 ³ / ₄ - 2 ³ / ₁₆	W4212R203	2 ³ / ₄ - 2 ¹ / ₈	W4212R202	—
	2 ¹³ / ₁₆	55	82	W4213	4.3	—	—	—	—	—	—	—
	2 ⁷ / ₈	55	82	W4214	4.3	—	—	—	—	—	—	—
	2 ¹⁵ / ₁₆	55	82	W4215	4.3	2 ¹⁵ / ₁₆ - 2 ⁹ / ₁₆	W4215R209	2 ¹⁵ / ₁₆ - 2 ³ / ₈	W4215R206	2 ¹⁵ / ₁₆ - 2 ³ / ₁₆	W4215R203	—
	—	—	—	—	—	2 ¹⁵ / ₁₆ - 2	W4215R200	—	—	—	—	—
	3	59	84	W4300	4.4	3 - 2 ³ / ₁₆	W4300R203	—	—	—	—	—
	3 ¹ / ₁₆	59	84	W4301	4.4	—	—	—	—	—	—	—
	3 ³ / ₈	59	84	W4302	4.4	3 ³ / ₈ - 2 ³ / ₄	W4302R212	3 ³ / ₈ - 2 ⁹ / ₁₆	W4302R209	3 ³ / ₈ - 2 ³ / ₈	W4302R206	—
	—	—	—	—	—	3 ³ / ₈ - 2 ⁵ / ₁₆	W4302R205	3 ³ / ₈ - 2 ¹ / ₄	W4302R204	3 ³ / ₈ - 2 ³ / ₁₆	W4302R203	—
	—	—	—	—	—	3 ³ / ₈ - 2 ¹ / ₈	W4302R202	3 ³ / ₈ - 2	W4302R200	—	—	—
	3 ³ / ₁₆	62	86	W4303	4.5	—	—	—	—	—	—	—
	3 ¹ / ₄	62	86	W4304	4.5	—	—	—	—	—	—	—
	3 ⁵ / ₁₆	62	86	W4305	4.5	—	—	—	—	—	—	—
	3 ³ / ₈	62	86	W4306	4.5	—	—	—	—	—	—	—